

SLP003-06

High Efficiency Multicrystalline PV Module

Electrical Characteristics	SLP003-06
Product code	003010601
Maximum power (Pmax)	3W
Voltage at Pmax (Vmp)	8.60V
Current at Pmax (Imp)	0.35A
Open-circuit voltage (Voc)	10.5V
Short-circuit current (Isc)	0.40A
Temperature coefficient of Voc	- (80 ± 10) mV/°C
Temperature coefficient of Isc	(0.065 ± 0.015) %/°C
Temperature coefficient of power	- (0.5 ± 0.05) %/°C
NOCT (Air 20°C; Sun 0.8kW/m ² wind 1m/s)	47±2°C
Operating temperature	-40°C to 85°C
Maximum system voltage	1000V DC
Power tolerance	+10%/- 5%

*STC: Irradiance 1000W/m², AM1.5 spectrum, module temperature 25°C

*NOCT: Nominal operating cell temperature (the data is only for reference)





Module Diagram

Dimensions in brackets are in inches.

Un-bracketed dimensions are in millimeters.

Unit: mm[in.]

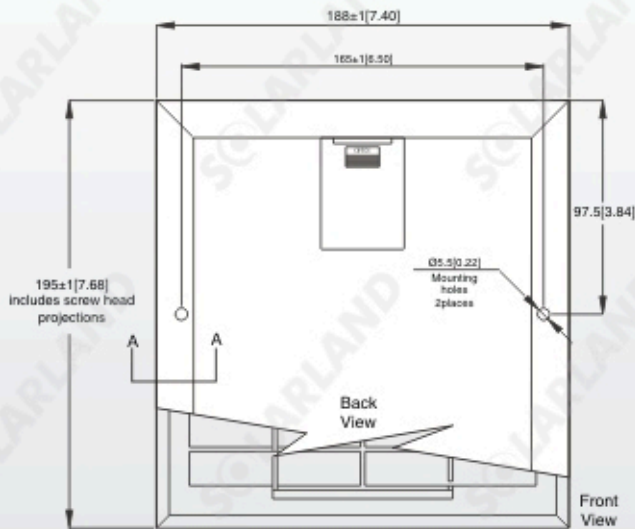


Section A-A

Features

- Nominal 6V DC for standard output.
- Outstanding low-light performance.
- Heavy-duty anodized frames.
- High transparent low-iron, tempered glass.
- Rugged design to withstand high wind pressure, hail and snow load.
- Aesthetic appearance.

Characteristics

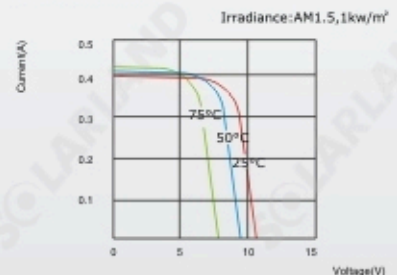

SLP003-06 I-V Curves

Specifications	SLP003-06
Cells	Polycrystalline silicon solar cell
No. of cells and connections	18(2X9)
Module dimension	195mm[7.68in.]x188mm[7.40in.]x17mm[0.67in.]
Weight	0.5kg[1.10lbs]
Packing information(Inner box)	205mm[8.07in.]x200mm[7.87in.]x25mm[0.98in.]
Packing information(Carton)	310mm[12.20in.]x225mm[8.86in.]x225mm[8.86in.](10pcs/ctn)

*Limited warranty: 2-year limited warranty of materials and workmanship; 10-year limited warranty of 90% power output. For detail, please contact us.

*Specifications are subject to change without notice at any time.