

SLP025-12

High Efficiency Multicrystalline PV Module

Electrical Characteristics	SLP025-12
Product code	025011202
Maximum power (Pmax)	25W
Voltage at Pmax (Vmp)	17.2V
Current at Pmax (Imp)	1.45A
Open-circuit voltage (Voc)	21.6V
Short-circuit current (Isc)	1.60A
Temperature coefficient of Voc	$-(80 \pm 10) \text{mV}/^\circ\text{C}$
Temperature coefficient of Isc	$(0.065 \pm 0.015) \%/^\circ\text{C}$
Temperature coefficient of power	$-(0.5 \pm 0.05) \%/^\circ\text{C}$
NOCT (Air 20°C; Sun 0.8kW/m ² wind 1m/s)	47±2°C
Operating temperature	-40°C to 85°C
Maximum system voltage	1000V DC
Power tolerance	+10%/- 5%

*STC: Irradiance 1000W/m², AM1.5 spectrum, module temperature 25°C

*NOCT: Nominal operating cell temperature (the data is only for reference)





Module Diagram


Dimensions in brackets are in inches.

Un-bracketed dimensions are in millimeters.

Unit: mm[.in.]

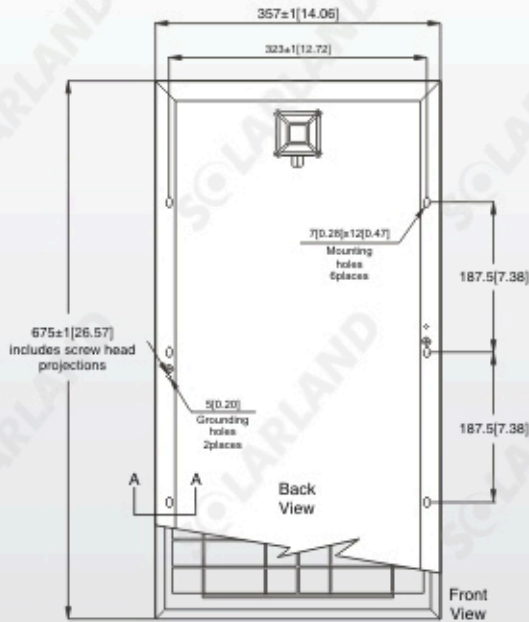

Junction Box
Top View (Lid Open)




Section A-A

Features

- Nominal 12V DC for standard output.
- Outstanding low-light performance.
- Heavy-duty anodized frames.
- High transparent low-iron, tempered glass.
- Rugged design to withstand high wind pressure, hail and snow load.
- Aesthetic appearance.

Characteristics

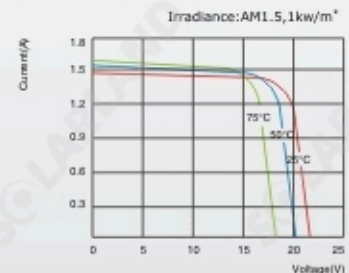

SLP025-12 I-V Curves

Specifications	SLP025-12
Cells	Polycrystalline silicon solar cell
No. of cells and connections	36(2X18)
Module dimension	675mm[26.57in.]x357mm[14.06in.]x30mm[1.18in.]
Weight	3.3kg[7.28lbs]
Packing information(Inner box)	685mm[26.97in.]x365mm[14.37in.]x35mm[1.38in.]
Packing information(Carton)	705mm[27.76in.]x215mm[8.46in.]x390mm[15.35in.](5pcs/ctn)

*Limited warranty: 2-year limited warranty of materials and workmanship; 10-year limited warranty of 90% power output. For detail, please contact us.

*Specifications are subject to change without notice at any time.